TEXAS '74 REMOTE SENSING PROJECT

Paul W. Cook
Statistical Reporting Service
U.S. Department of Agriculture
Washington, D.C.

August 1977

Tegas
loy and pasture
digitination
registration
DAM-COEF

3 :

TABLE OF CONTENTS

I.	Introduction	1
II.	Registration Development	4
III.	Digitization	6
IV.	Data Analysis	8
V.	Conclusion	15
	Appendix A	17
	Appendix B	18
	Appendix C	21
	Appendix D	22
	Appendix E	30
	References	34

		1
		,
		,

Texas '74 Remote Sensing Project

Ву

Paul W. Cook

I. INTRODUCTION

Our research group chose a contiguous group of thirteen counties in Texas during the spring of 1974 for a test of the crop acreage prediction capabilities of the LANDSAT I satellite (at that time it was known as ERTS or Earth Resources and Technology Satellite). Specifically, the counties chosen were as follows: Bastrop, Bell, Burleson, Coryell, Falls, Fayette, Lee, Limestone, McLennon, Milam, Travis, Washington and Williamson counties.

Much of the land in the above 13 counties is primarily used for pasture. Both sorghum and cotton are prevalent in each of these counties. Peanuts, corn, wheat and oats are grown also. SRS crop estimates indicate, however, that no crop is grown on more than 10% of the total county acreage. In fact, most of the crops, other than cotton and sorghum, are grown on only 2 or 3% of the total county area. This means that most of the land in this area is used for pasture and/or hay crops.

The ground information which was obtained affirmed this allocation of crop acreages. Most fields were of pasture land with only small areas devoted to the major crops of the county. This resulted in a shortage of training information for cotton and sorghum.

Another difficulty encountered was obtaining cloud-free imagery. Throughout the growing season, the only usable imagery obtained was for June 27 and June 28, 1974. Because of this lack of multiple time imagery, it was not possible to examine what advantages may be obtained by using multiple time periods in improving the crop estimates.

The majority of the ground data was obtained for the June 27 pass (specifically, LANDSAT Scene 1704-16231). Of the 64 segments for which there was information, 42 were on this scene. The remaining 22 segments were primarily pasture land with very few other crops.

Because of the lack of training data, the project was limited to six counties: Bastrop, Burleson, Fayette, Lee, Milam and Washington. These counties were wholly contained within the scene to be analyzed.

location of the individual segments (square mile sample areas which are used in our operational probability surveys) proved to be a difficult task. Only 10 segments were sufficiently well located to be used in training the statistical classifier (Gausian multivariate normal assumption). Lack of contrast between fields and other vegetation within the areas containing the segments was the primary cause of our not being able to locate all the areas accurately. Fortunately, however, another 10 segments contained additional ground information that was useful for testing the classifier accuracy. Only the global scene calibration was used to locate these segments, but the accuracy of classification for these areas indicated that they were located sufficiently well for use as test fields.

This lack of a large number of fields available as training data forced a reduction in the scope of the project. Only one county was selected to be analyzed based on the best set of statistics obtained from what training data was available. We chose Milam county since it contained the highest percentage of cotton and sorghum in the six-county area. Also, the location of the 10 training segments seemed favorable for obtaining data representative of the crops in Milam county.

Thus, the 13 county project became a study in making use of only minimal information under adverse conditions. Not only was the number of fields available for training quite small, but the contrast between fields was so minimal that it prevented any visual determination of their correct location. This meant that only the correspondence of reported to digitized acreage could be used for determining what fields to use as training or test data.

The results of the study seem to indicate that more data for training and test is a necessity to make accurate acreage estimates. Small quantities of data cause instability in the estimates of the means and the variance-covariance matrices of the clusters for the various crops. Thus, small changes in what data is clustered and how the clusters are combined can produce radical alterations in the classification accuracy as evidenced by the overall classification accuracies varying from 40 to 75% in this study. (See Appendix D)

Various methods were used to cluster the training data for purposes of classification. Combining all the grasses into pasture categories and then clustering this group while cotton and sorghum were each clustered separately proved to be the best grouping. When only one group was used for pasture, this group showed too great an overlap with the sorghum and cotton groups for accurate classification results.

Since the data base was small, it was difficult to evaluate the effects of classification accuracy on the acreage estimate

itself. Conceptually at least, higher accuracy rates would seem to improve the final estimate. Higher accuracy did seem to give better estimates for the direct acreage expansion method, but the data did not allow us to determine whether greater accuracy would improve the estimate while using ratio or regression estimation.

II. REGISTRATION DEVELOPMENT

Before the satellite data can be classified, appropriate training information must be located. The segments in the June Enumerative Survey were meant to provide random samples of data representing the various crops which occur in a given area or, in our case, within a LANDSAT scene.

Locating the segments within the LANDSAT CCT (Computer Compatible Tape) data proved to be a formidable task until means were developed to utilize mathematical equations (called affine transformations) for relating the LANDSAT coordinates and man base latitude and longitude. This process of correlating the two sources of information is called registration.

First, registration points (i.e., points of high contrast in the imagery and map base) are located (see Appendix A). Latitude and longitude values for such points are then obtained from a USGS 7 1/2' quadrangle map (where available) to the nearest .0001 degree of latitude and longitude and the appropriate LANDSAT coordinates are also obtained to the nearest .1 pixel. A pixel (or picture element) is the smallest resolution element of the satellite, and is about 79 meters long by 57 meters wide. Therefore, the map accuracy corresponds to about 11 meters on the earth's surface, whereas the grey scale gives about eight meters placement accuracy for the LANDSAT data.

During the early experimentation with the techniques for registering LANDSAT data to map base, only small 400 by 400 bixel areas were used for locating registration points (typically, about 10 were used in each area). A set of linear affine transformations related the map coordinates to the satellite coordinates (see Appendix B). This method allowed us to obtain maximum residual errors of 150 meters on the ground.

Next we did a second step of registration for each segment by locating six more registration points near each segment. These points were again checked with the larger area registration points to be certain that they were accurately located as well. These six points whose locations had been accurately determined were then used to locate the field boundary locations for each segment so registered. For this second step of registration maximum residual errors typically ranged in the 30-60 meter range.

Two different systems for improving our initial methods of registration are now available. First, there is a program developed by Ed Schlosser of Lockheed (Johnson Space Center). It provides for full frame registration with the use of only 16-20 control points well scattered about the scene. Accuracies for an entire scene vary, but may often be on the order of 100 meters

root mean square error or less (See Appendix C). This program is available as DAM-COEF, coded as a SAS (Statistical Analysis System) procedure.

The other registration program is by Walt Donovan of the Center for Advanced Computation at the University of Illinois. Donovan's program uses a second order full term polynomial for the global calibration with residual error on the order of 300-400 meters (i.e., 4-5 pixels). A second step can then be either a local linear registration or (newly developed since this Texas project was completed) a movement of the entire segment file by fractional row and column pixel increments.

III. DIGITIZATION

After a LANDSAT scene is registered to map base, those LANDSAT pixels which correspond to the appropriate areas of interest must be extracted. Of course, appropriate data for training our classifier is required. The field boundaries must be accurately located in order to obtain the correct pixels for training the classifier. Another requirement is to locate those areas for which we wish to make acreage estimates.

Because the satellite does not produce its data relative to an exact map scale, the LANDSAT data does not directly overlay onto maps. Consequently, a method of making the boundary data available in computer compatible form whereby the corresponding pixels for each field (or any other area) could be extracted for analysis purposes as accurately and easily as possible was needed.

A digitizer can give the location (i.e. an (x,y)-reading) of any point on a map (or photo or drawing, etc.) to either .01" or .001" (depending on how accurately the tablet and controller are designed to perform). It does this by measuring the time it takes a current to travel from a point on the tablet back to the controller, an electronic timing device.

An interactive analysis system (EDITOR) programmed on the computers (PDP-10's) operated by Bolt, Beranek and Newman (BBN) at Boston, Massachusetts was used to analyze the data. Walt Donovan and Martin Ozga of the Center for Advanced Computation (CAC) at the University of Illinois provided the programming expertise in developing software. Many improvements and modifications of their programs were made as a result of the analysis of the Texas data.

An Altek digitizer with .001" accuracy is directly interfaced into the computer network so that processing of the digitized data may be done immediately. Only individual data noints defining closed boundaries are selected to create the files corresponding to field, segment, or strata boundaries. Consequently, individual points for each area to be digitized must be marked. For regular boundaries, only the vertices need be marked, but for irregular edges, one must indicate enough points to approximate any curved lines.

During digitization, calculations are made to determine the acreage of each enclosed area digitized. This allows for a check against reported acreage. As an example, when digitizing a segment each field is digitized separately and stored onto a common file for that particular segment. During this process, no point is recorded more than once. Thereby, no common boundaries may overlap and common edges are preserved. A checking program

may be run as well to make sure no areas have been digitized incorrectly.

Each digitized file is first converted to geographic latitude and longitude values by means of calibration points for which latitude and longitude are known. This process prepares the file for use with the satellite-to-map-base registration coefficients. In this way, one obtains the location of the field boundaries (or in a more general sense, for land-use boundaries on a county or state level) by which the appropriate LANDSAT pixels may be examined.

Digitizing a segment creates what we call a segment file. Included in this process is the calibration to latitude and longitude values. Creation of a mask file is done by using a calibration or registration file of coefficients to transform the original file into LANDSAT coordinates. The mask file is then used to extract the appropriate LANDSAT data in a process called packing a window. A packed window file contains the LANDSAT data tagged appropriately as to whether each pixel is within a field and has a cover type, on a boundary between fields, or background (i.e., has an unknown cover type). See reference 2 for more details.

This process of packing a window allows the selection, in various ways, of data to be used in developing the training statistics for each cover type. Either a specific cover type may be chosen or specific fields from selected segment mask files may be chosen. Also, specific fields may be denoted as training or test fields so that selection only on that basis may be made as well. Boundary pixels which overlap fields may be either included or excluded as desired.

IV. DATA ANALYSIS

In Texas, much of the data was not usable for determining the crop classes. Inaccurate field boundaries (as indicated by rather large discrepancies between reported and digitized acreage), fields of burnt or abandoned crops, and pasture land of uncertain content made selection of training and test fields a difficult task.

Because these effects could not be easily removed from the field data, we chose to eliminate problem fields from analysis and concentrate on those characteristics most closely matched to the crop information of interest. This subset of fields was used to obtain the statistics for classifying the remainder of the scene. Also, only those segments for which a local calibration file could be made were used for training data so as to insure that the data was accurately located.

All twenty-one available segments were located by means of the full second order linear equation provided by Donovan. Unfortunately, the lack of adequate contrast between fields did not permit the determination of how accurately the fields were located. This made it necessary to perform a second step of registration, which would assure that each field was located to an accuracy of about 30-60 meters (i.e., less than a pixel's width).

The lack of adequate contrast between fields also made the location of points for use in local registration difficult. Usually, small woods and rivers proved to be the best areas for the determination of the calibration points. For regularly shaped areas, the centers of woods were best, whereas for irregularly shaped areas or twisting rivers, the sharp edges of the bends worked well. In each case, an area no larger than 100 pixels by 100 pixels was used to ensure that the linear equations remained appropriate.

Of the twenty-one available segments, ten were successfully registered locally. Ten other segments seemed to be reasonably close for use in testing, while one segment defied all attempts to determine a correct location for it. Consequently, only the ten locally registered segments were used for obtaining the crop signatures. The remaining ten segments were then used to obtain part of the test fields. Also, the original ten segments' fields were included in the test data in order to provide sufficient test data since the ten locally registered segments contained about two-thirds of the available cotton and sorghum pixels.

The list of fields with boundary pixels on page 9 points out how little data was available for the project. The first

Segment Fields with Boundary Pixels

1 204 2 10 79 285 350 8 3 4 27 50 147 5 2 25 1 25 29 6 64 161 4 60 95 7 0 34 212 314.5 28 9 2 10 210 210 10 291 210 86 13 64 196.8 21 65 89 14 352 15 411 109 157 19 248 20 0 5 41 105 388	Pasture1/			Cot			Segment
2 10 79 285 350 8 3 4 27 50 147 5 2 25 1 25 29 6 64 161 4 60 95 7 0 34 212 314.5 28 9 2 10 210 210 10 291 447 447 12 12 210 86 13 64 196.8 21 65 89 14 352 15 411 430 52 17 7 109 157 18 6 39 4 30 52 19 248 20 0 5 41 105 388	Acres	Pixels	Acres	Pixels	Acres	Pixels	
3 4 27 50 147 5 2 25 1 25 29 6 64 161 4 60 95 7 0 34 212 314.5 28 9 2 10 210 210 10 291 447 447 12 12 210 86 13 64 196.8 21 65 89 14 352 15 411 352 411 105 388	390	204					1
4 27 50 147 5 2 25 1 25 29 6 64 161 4 60 95 7 0 34 212 314.5 28 9 2 10 210 210 291 10 11 1 54 447 447 447 12 12 210 86 86 89 447 86 89 411 352 411 109 157 109 157 248 20 0 5 41 105 388	15	8	350	285	79	10	2
5 2 25 1 25 29 6 64 161 4 60 95 7 0 34 126 8 73 121 212 314.5 28 9 2 10 210 10 291 210 291 11 1 54 447 447 12 12 210 86 13 64 196.8 21 65 89 14 352 15 411 411 16 5 39 4 30 52 17 109 18 6 39 157 248 20 0 5 41 105 388							3
6 64 161 4 60 95 7 0 34 126 126 8 73 121 212 314.5 28 9 2 10 210 210 10 291 447 447 447 12 12 210 86 86 13 64 196.8 21 65 89 14 352 411 352 411 109 15 39 4 30 52 52 17 109 157 248 20 0 5 41 105 388	196	147			50	27	4
7 0 34 126 8 73 121 212 314.5 28 9 2 10 210 10 291 447 447 12 12 210 86 13 64 196.8 21 65 89 14 411 352 411 411 16 5 39 4 30 52 17 7 109 157 19 248 20 0 5 41 105 388	50	29	25	1	25	2	5
8 73 121 212 314.5 28 9 2 10 210 10 291 291 11 1 54 447 12 12 210 86 13 64 196.8 21 65 89 14 352 411 352 15 39 4 30 52 17 109 157 109 18 6 39 157 248 20 0 5 41 105 388	128	95	60	4	161	64	6
9 2 10 210 10 291 11 1 54 447 12 12 210 86 13 64 196.8 21 65 89 14 352 15 411 411 16 5 39 4 30 52 17 109 157 19 248 20 0 5 41 105 388	218	126			34	0	7
10 1 54 291 11 1 54 447 12 12 210 86 13 64 196.8 21 65 89 14 352 411 411 411 411 16 5 39 4 30 52 109 157 199 248 20 0 5 41 105 388	136.4	28	314.5	212	121	73	8
11 1 54 447 12 12 210 86 13 64 196.8 21 65 89 14 411	234	210	10	2			9
12 12 210 86 13 64 196.8 21 65 89 14 352 15 411 411 16 5 39 4 30 52 17 109 157 19 248 20 0 5 41 105 388	406.2	291					10
13 64 196.8 21 65 89 14 352 15 411 16 5 39 4 30 52 17 109 18 6 39 157 19 248 20 0 5 41 105 388	531	447			54	1	11
14 352 15 411 16 5 39 4 30 52 17 109 109 18 6 39 157 19 248 20 0 5 41 105 388	103	86			210	12	12
15 411 16 5 39 4 30 52 17 109 109 18 6 39 157 19 248 20 0 5 41 105 388	212.5	89	6 5	21	196.8	64	13
16 5 39 4 30 52 17 109 18 6 39 157 19 248 20 0 5 41 105 388	436	352					14
17 109 18 6 39 157 19 248 20 0 5 41 105 388	605	411					15
18 6 39 157 19 248 20 0 5 41 105 388	67	52	30	4	39	5	16
19 248 20 0 5 41 105 388	326	109	!				17
20 0 5 41 105 388	284	157			39	6	18
	286.5	248					19
21	470	388	105	41	5	0	20
240	259	240					21
OTAL 264 1013.8 570 959.5 3717	5353.6	3717	959.5	570	1013.8	264	l OTAL

^{1/} Pasture with trees; stubble; sudan stubble; Johnson grass;
hay; wheat stubble; oats; oat stubble; idle; coastal pasture;
pasture

eleven segments listed (segment 3 could not be adequately located) were the ones which made up the training data since they had most of the cotton and sorghum data and also were locally registered. The remaining ten segments contained primarily pasture test data with only a few pixels of sorghum and cotton.

During the course of this project, Donovan developed software to drive a ZETA (x,y)-plotter to make plots of the digitized segments both to map and LANDSAT scale. This allowed further checks on the locational accuracy of each segment as well as shifting of each segment to match field boundary outlines (where such outlines were discernable).

This development of plotter software has allowed a check of the presently available registration methods. Plots of the field outlines were made for each segment by using the second-order polynomial, the linear local fit and DAM-COEF to compare the results of each method.

The actual location could not be compared for each method because photo-interpretation techniques were not satisfactory to determine the location for each segment. However, the orientation and size of the plotted fields could be compared. If the local fit is considered as correct, then DAM-COEF was closer to the way in which the local fit showed the segment. In all cases, the second-order fit showed the fields to be tilted differently and to be somewhat smaller than in the case of the linear fit.

Although the best method seems to be the linear local fit, great care must be taken in performing the local calibration step. Points chosen as local registration points must be checked with the global calibration boint file to be sure that they are properly chosen. These points will generally be outliers as far as the global fit is concerned, but there should be less than a two pixel error for them to be acceptable. The rms error for this local fit should be less than .5 pixel in either line or column while the maximum error should be less than .6 pixel. This will allow quite accurate location of the field information within each segment.

After the ten segments had been located, a first attempt at unsupervised data analysis was made. Fields for which the ground data was deemed satisfactory (i.e., the reported acreage and digitized acreage checked within 10% and the crop or use information agreed) were chosen from the 10 locally registered segments and backed into one large file. No boundary pixels were included.

The cover types included in the fields chosen were as follows: corn, sorghum, permanent pasture, cotton, pasture,

hay-grazer, coastal pasture, idle land, oats, hay, Johnson grass, sudan stubble, cucumbers, milo, stubble, pasture-with-trees, sorghum stubble, other vegetables, plowed land, and cotton. Since some of these categories contained very little training data and were very similar spectrally, it seemed apparent that not all of these groups would be readily separable.

EDITOR uses a clustering routine based on the ISODATA algorithm in which the four-dimensonal space is partitioned into clusters or groups based upon a Euclidean distance criterion for separation of clusters. For the first attempt at making this separation all the data available within the ten registered segments was used to set up an appropriate number of categories (twenty) to correspond with the number of different crops represented. This clustering of the LANDSAT data corresponding to these selected fields was a first attempt at determining what spectral groups occurred naturally in the scene.

Based on the initial unsupervised clusters, no apparent separation of crop types seemed possible. The cluster groups' means and their variance—covariance matrices when used to classify the crop groups picked up most of the cotton and sorghum as though they were pasture groups. Consequently, it was decided that for this data set the clustering technique available was unable to separate known crop types without supervision.

When only cotton acreage was examined it was noted that certain fields belonged almost entirely to one of two spectrally separable groups based on clustering cotton into seven groups. Examination of all the ground information indicated that the cotton fields contained two quite distinct types of cotton. One variety is quite short - usually about 16" - 20" tall during the June visit whereas the other is quite tall - usually 30" - 36" tall at this time. Also, the two varieties of cotton require quite different methods of harvest. The short variety is harvested with a stripping machine whereas the taller variety requires a picking machine.

Although detection of differences within the same crop type had not been the purpose of this project, the forethought of providing supplementary ground information forms (as developed by Fred Warren) had made it possible to determine that clustering had shown the existence of two spectrally different cotton groups.

To determine if the forming of additional clusters within each crop category would reduce the overlap of categories, the cotton pixels were clustered into 16 categories, sorghum into 10 categories, and the pasture group into 8 categories. For each crop the statistics file was run through a cluster combining program (developed by Bob Ray of CAC). Based on the results from

running this program the cluster classes were combined as follows: the cotton clusters were combined into six groups, the sorghum clusters were combined into six groups and the pasture clusters were combined into eight groups. These 20 groups' means and their variance—covariance matrices were combined into one statistics file for later classification tests.

Cluster groups were only combined when they showed little informational loss and they were not of the same category type. When a group of fewer than eighty (80) points could not be combined into another group, it was deleted.

Even with this large number of clusters for each group, considerable overlap between clusters was noticeable as indicated by the low rates of classification accuracy and the frequent classification of cotton and sorghum into the pasture classes. Also, the cluster combining program indicated that little informational loss would occur from combining some of the cotton and sorghum clusters with those from the pasture clusters.

Additional classifications of the selected fields were done using various numbers of clusters applied to all the pixels whose locations were accurately known. The accuracy of classification results varied considerably from one group of clusters to another. In no case did the classification accuracy exceed 80%, though low accuracies of nearly 40% did occur. This instability of the cluster group statistics' classification accuracy seems to be a further indication that crop types for this particular LANUSAT scene are not distinct spectrally.

Based on ten groups of clusters, the statistics were determined and classification of Milam County on the ILLIAC IV at Moffett Field, California was undertaken.

An attempt was made to improve this classification by applying weights to each category based on crop acreage estimates made by SRS for 1972. Assuming each pixel to represent 1.14 acres, the following acreage estimates were obtained (compared to 1974 SRS estimates).


SI	1974 RS ESTIMATES	ACRES EQUAL PRIORS	UNEQUAL PRIORS
Sorghum	57,700	45,501	7,731
Cotton	31,500	74,303	15,240
Pasture/Stubble	N/A	536,840	632,416
Water*	959	1,093	1,087

^{*}Data from Texas Water Resources Board

A computer program developed by D. Christodoulidis of Ohio State University further indicates why such large changes in acreage may occur. The circular Fourier series plot of the mean vectors and variance vectors show little differences between cluster groups except in the case of water. This confirms the high separability of water from the agricultural crops for this LANDSAT scene. Consequently, in the discriminant space one would find the water vector separate from the other groups. However, the cotton, sorghum and pasture/stubble vectors show a great deal of overlap. (See Appendix D.) Further evidence of the overlap between cluster groups is shown by a more recent program developed by Bob Starbuck of our group. It shows rather extreme overlap among groups within the two dimensional vector space of bands 5 and 7. (See page 14 to examine this plots.) presence of similarity or overlap between cluster groups would explain why prior probabilities applied to the cluster groups would yield widely varying acreage estimates.

Appendix E contains the regressions and plots of data from the usable fields within the twenty-one segments that contained the most reliable ground information. Unfortunately these plots of reported acreage vs. classified pixels within each field (including boundary pixels) do not indicate that a linear estimation technique would be valid for the analyzed data.

90.0% CONCENTRATION ELLIPSES FOR BANDS 7 AND 5 TEN CLUSTERS FOR MILAM COUNTY

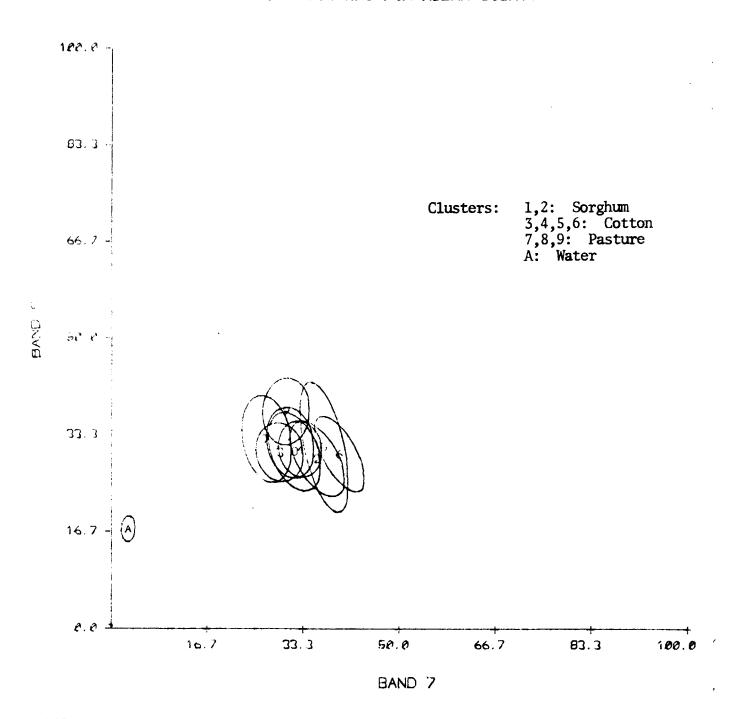

(USDA- 3R5) MILAM, CF; 1, 15- Jun - 76 15: 32: 56

V. CONCLUSION

This study of Milam county, Texas has pointed out a number of problems which are present in analysis of the LANDSAT data using our presently available ground data. Solutions to some of these procedural problems were developed during this study.

Because of the difficulties in determining the accuracy of field sizes and crop types for certain segments, our present projects have included greatly improved checking procedures for field acreages and crop types. Data is collected in the same manner, but with more emphasis on the accuracy of field placement, of reported acreage from the farmer, and digitized acreage from aerial photography (either infra-red or ASCS acquired enlargements). Our review procedures have greatly improved the accuracy of field location and sizes and thereby allow the use of regression estimation techniques with full segment data.

Accurate location of training data is the next requirement for use of the digital LANDSAT data. Registration techniques were developed as part of this study that now allow the location of field boundaries to within 40-60 meters of their actual location. This means that the data chosen as training or test is definitely of a given crop type. Consequently, full use of the data in making regression estimates of crop acreages is now possible.

Two techniques of analysis used in this project need to be tried on larger data sets to see if they contribute to overall accuracy and efficiency. Clustering the various crops into subgroups determined by the information loss program provided by Bob Ray seemed to improve the overall accuracy as well as the field-by-field accuracy of classification. The overlap between cotton and sorghum seemed to be somewhat reduced by this method of cluster combining. Indeed, two varieties of cotton could be separated this way. The tall (or picker) cotton seems to be quite separable from both the short (or stripper) cotton as well as from sorghum.

Use of equal priors with the cluster groups seemed to give the best accuracy results. Also, the estimates using equal priors were much more reasonable.

The great spectral confusion of the various crops for this scene does point to the importance of knowing or having imagery for the time at which the crops are most separatable spectually. Quite possibly for another time of the year, the crops could be separated much more easily. In fact, with many crops having different growing and harvesting times, multi-temporal imagery may make a more accurate crop classification possible.

However, one must also acknowledge the limits of the sensor to differentiate among the various crop types. Such similar crops as oats, hay and Johnson grass did not seem to be distinguishable either from one another or from the pasture and idle land categories. This finding does not seem unreasonable since the pasture category is probably a mixture of all these grasses as well as some others not mentioned. Also, all these categories look similar when viewed in infra-red photography.

APPENDIX A

Some Notes On Registration Points

- 1. Generally only bands 5 and 7 need be used for locating registration points. Band 7 is particularly useful for water bodies and land-water interfaces. In band 5 areas of vegetation, such as trees, and interstate highways are particularly easy to find.
- 2. Areas where large variations may occur during wet or dry weather conditions should not be used. For example, bends in rivers where the map indicates the sides of the river have only very gentle rise should not be used. However, steep sides of a river or lake will usually provide a stable relationship between land and water and thereby make more promising registration points.
- 3. When using the center of a lake or wooded area be sure that it is relatively small, i.e., no more than 30 pixels in area. However, for irregularly shaped lakes or vegetation areas, you may use points within the centers of areas jutting out from its central mass.
- 4. Choose points such that the point may be defined as a single pixel. This simplifies location of the correct pixel and makes it easier to enter the correct LANDSAT coordinates into the program.
- 5. When choosing road intersections in band 5, be sure to choose only narrow roads that form a distinct intersection point. Large road intersections generally are difficult to determine a precise meeting point.

APPENLIX B

The Affine Transformation

Ralph Bernstein (See Reference 9) notes the various components of error for the MSS as being due to the following:

Platform Effects

Altitude: Scale distortions occur along scan and vary with time. Magnitude of correction - about 1.5 km.

Attitude: The three main components of attitude are pitch, roll and yaw. Yaw and pitch changes affect the data spacing along the flight path, while roll changes it along the scan line. Magnitudes vary, but pitch is about 12 km, roll 12 km, and yaw 2.46 km.

Velocity: Changes in velocity may produce 1.5 km of along-track scale distortion.

Scene Effects

Earth Rotation: While the MSS mirror completes each scan, the rotating earth below it causes along-scan distortion of about 13.3 km.

These effects require the indicated corrections when we consider the entire 180 km by 180 km image. However, for only small areas of the MSS image, such effects are reduced and a simple first oder polynomial (or affine transformation) can adequately model these various platform and scene effects. The equation is of the following form:

LANDSAT line = a · latitude + b · longitude + e LANDSAT column = a · latitude + b · longitude + e


location of the registration points by latitude and longitude allows estimation of the parameters of the equation and thereby prediction of the location of geographic coordinates in terms of the scanner coordinates. By taking the inverse of the equations, map coordinates of the indicated MSS coordinates of interest may be predicted. Thus, every geographic point is cross-referenced with its corresponding scanner location.

- LRT * 0.39900446+92 + (-0.59979446+03 * 600) + (-0.10096796+03 * 600) LON = 0.89076136+02 + (-0.89932616+03 * 600) + (-0.64645996+03 * 600)
- ROW = 0.3540331E+05 + t-0.1367606E+04 * 1AT1 + t-0.2136158E+03 * LON1 COL = 0.1508994E+06 + t-0.5062685E+03 * LAT1 + t-0.1467729E+04 * LON1

R-SQUARES:

LAT	LON	ROW	COL
996959	999957	GOOGLE	000040

OBSERVATIONS			RESIDUALS				
RON	COL	LAT	LON	ROM	COL	LAT	LON
2209.55	335.55	38.22913	89.37992	-4.35	-14.22	-0.00446	-6.60810
2041.21		38.32126	89.17812	-3.59	-6.49	-9.00315	-0.00329
1740.20	718.39	38.51826	89.02666	-2.70	-3-88	-9.00226	-6.00182
2143.72	958.07	38.21523	88.9 644 1	-9.43	-8.59	-0.00118	-0.00542
1531.68	338.99	38.70022	89.22584	-5.04	1.57	-0.60333	0.66227
1479.85	251.92	38.74561	39.27045	⊣4. 32	2.95	-0.00269	9.00300
270.41	1278.12	39.49171	98.30883	12.03	-4.52	9.66793	-9.00577
330.49	1194.34	39.45187	88.39096	0.07	12.08	0.00131	0.00782
2137.91	1912.12	33.12562	88.35146	2.15	9,44	0.00151	-0.00023
363.92	2038.46	39.34312	87 .84888	0.58	5.52	9 .99899	0.00343
184.27	2414.42	39.42772	37,56016	-1.70	0.54	-0.00110	0.00075
137.91	25 •3.98	39.44119	87.43627	-3.17	⊸4.91	-9.00267	-9.00243
12 9.7 8	2738 .86	39,43060	87.33326	-3.78	-6.58	-0.90327	-0.00337
1411.20	1490.80	38.67095	88.46188	-2.36	17.28	0.00011	9.01175
251.67	3015.70	39.31719	87.18145	-4.56	-8.97	-0.00405	-9.00474
366.38	3092.44	39.23127	87 .15800	-2.35	-11.15	-9.99274	-9.00668
1862.24	3053.13	38,19596	87.54996	-6.11	0.68	-0.0042 0	0.00187
687.98	2830.52	39.03779	87.40938	0.95	-2.97	9.99846	-0.00159
471.24	2777.13	39.19261	87.39173	-9.29	-2.99	-9.00049	-9.00138
1166.09	2621.40	38.72694	87.65863	0.69	-2.73	9.9 9929	-0.00195
1162.31	2936.19	38.70723	97.51924	-9.26	-2.52	-9.00044	-9.00159
1417.06	2903.53	38.52334	87.53917	-1.26	9.98	-0.00079	9.99991
1697.48	2660.95	33.41410	87.74376	-3.94	3.39	-9.06241	9.00311
1877.86	2383.29	38.25753	87 .9 86 96	9.36	3.41	9.99957	6.00210
1939.52	2552.75	38.20030	87.89145	4.16	3.71	0.99323	0.00138
1939.37	2552.67	38.20384	87.88 90 3	9.36	1.27	9.99668	-9.09144
1969.25	1735.45	38.26387	98.41964	-9.80	-7.63	-9.99134	-9.00474
1952.45	1147.56	38.33448	98.79339	7.92	-9.75	9.99459	-9.00817
1148.52	420.93	38.96686	89.08478	-1.61	8.43	-9.00024	9.9 <mark>0589</mark>
1361.65	1680.11	38,68864	88.31739	3.15	3.47	6.99254	9 .00150
747.44	2695.35	39.02040	87.56938	2.44	-1.21	9.99158	-9.90138
		38,45839	88.2576 8	8.80	4.63	0.00657	9 .00089
		39.34013	88.16915	2.54	8.78	0.66267	9 .00504
		38.21196	88.44722	1.78	1.15	0.99134	0.00032
845.42	2778.20	38.93438	87.48202	1.45	-9.13	9.66699	-9.0 00 45
1712.13	2599.33	38.34863	87.81510	-4.62	4.32	-9.00237	6.00374
1833.54	3917.53	38.22383	87.56783	-6.52	5.42	9.09616	9 .9935 9
2075.79	3147.97	38.64085	87.54130	-2.85	4.29	-9.00159	9.00341
1469.70	2720 .19	38.50765	27,67169	1.61	4.12	9.00158	0.00225

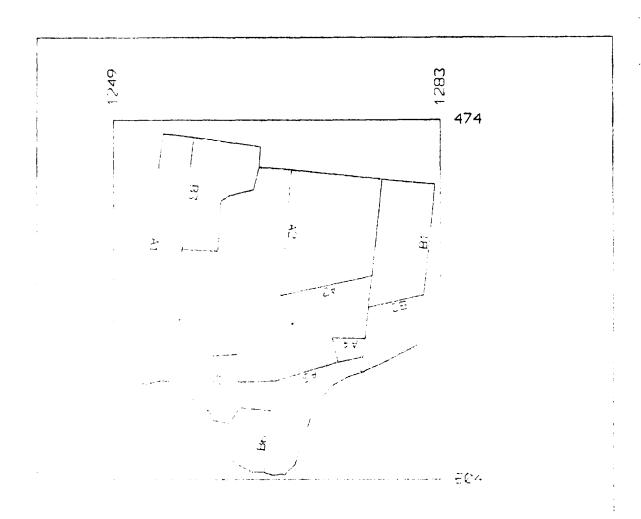

APPENDIX C

The DAM-COEF procedure (as developed by Ed Schlosser, Lockheed Corp. at the Johnson Space Center, Texas) provides a reasonably accurate means of registering LANDSAT data to map base without requiring that the LANDSAT data be altered—either geometrically or radiometrically. Accuracies for the location of predicted areas seem to be on the order of 100 meters when a control point network is carefully chosen. A diagram which spatially lists the control points chosen greatly facilitates the choice of points to ensure that the scene is covered by a well-scattered network of points.

By modeling the irregularities of the sensor's operation and its platform's location, Schlosser has made it possible to use a first order affine transformation to relate the LANDSAT data to map coordinates. Major components in the model are a consideration of the sinusoidal mirror velocity profile (affecting the pixel size across scan), the satellite's altitude (scale distortions), and its pitch and roll. Also, to further make the linear model appropriate, all latitude and longitude values are converted to the Universal Transverse Mercator (UTM) projection.

DAM-COEF requires fur ther advantage is that approximately twenty points to register an entire scene to about 100 meters accuracy. This represents a significant time savings over use of higher order polynomials which require upwards of 100 points to ensure sufficiently accurate location for our work. Its major disadvantage, at least for now, is its inability to allow for multitemporal analysis in the same manner which is presently data available, i.e. making the pixels of two or more scenes overlay so as to form an eight channel (or more) tape with each pixel having data for two or more dates available for it.

APPENDIX D

The next two pages give two examples of classification accuracy based on only the training data using different methods of obtaining the classification statistics. As can be noted, considerable differences were evident.

Following these pages are the results of the final ten cluster groups used. Accuracies of these groups used in classification are given for both the training and test data sets. Also, charts showing the similarities among the different clusters and the overlap between cluster groups are displayed.

	RIZED TO:			
FROM:		SORGHUN STUBBLE:		
•			•	•
•	• 1	PASTURE WITH TREES:	•	•
•	•	STUBBLE:		•
:		SUDAN STUBBLE:	Ĭ.	•
:	•	JOHNSON GRASS:		
1	•	HAY:	i .	•
:	:	OATS:	•	
:	:	IDLE:	1	:
:	MILO:	COASTAL PASTURE:	:	:
:	HAY GRAZER:		COTTON LOW:	•
}	SORGHUM:	PERMANENT PASTURE:	COTTON:	TOTAL:
MILO:	:	:	:	:
HAY GRAZER:	:	1	:	:
SORGHUM:	154:	67 :	135:	356:
SORGHUN STUBBLE:	:	:	:	1
PASTURE WITH TREES:	<u>h</u>	:	:	•
STUBBLE:	й Я	:		:
SUDAN STUBBLE:	h s	:		:
JOHNSON GRASS:	:	:		:
HAY:	*	ž.		
OATS:	L P	u		:
III.E.	i.	L #	1	.
COASTAL PASTURE:	•	- -		<u>.</u>
FESTURES	-	-		1
PERMANENT PASTURE:	194 :	478:	338	920:
:Wali Mattao	EQUITE:	71.00	5 ئىيىتىلىد ئا	::
COTTON:	76.1	60:		670:
	334*			
11.171.4	3.3 11 s	000 •	1,500.4	1340.

PER CENT CORRECT BY COVER

h([1],[0])HAY GRAZER SORGHLIN 43.26% SORGHUM STUBBLE PASTURE WITH TREES STUBBLE SUDAN STUBBLE JOHNSON GRASS HH''GATS IDLE COASTAL PASTURE PASTURE PERMANENT PASTURE 51.96% COTTON LOW 79.70% COTTON

CATEGORIZED TO: FROM: SORGHUM STUBBLE: :PASTURE WITH TREES: STUBBLE: SUDAN STUBBLE: JOHNSON GRASS: HAY: OATS: : IDLE: COASTAL PASTURE: MILO: :HAY GRAZER: PASTURE: COTTON LOW: SORGHUM: PERMANENT PASTURE: COTTON: TOTAL: MILO: : HAY GRAZER: 193: 87: 356: SORGHUM: 76: SORGHUM STUBBLE: : : • PASTURE WITH TREES: STUBBLE: SUDAN STUBBLE: JOHNSON GRASS: 扫描字: DATS: IDLE: COASTAL PASTURE: ÷ PASTURE: • : PERMANENT PASTURE: 90: 743: COTTON LOW: . 2 :

39:

322:

84.78%

568:

670:

790: 1994:

63:

882:

PER CENT CORRECT BY COUER

COTTON:

TOTAL:

MILO HAY GRAZER SORGHUN 54.21% SORGHUM STUBBLE PASTURE WITH TREES STUBBLE SUDAN STUBBLE JOHNSON GRASS HAY OATS IDLE COASTAL PASTURE FASTURE PERMANENT PASTURE 76.76% COTTON LOW

OWERALL PERCENT CORRECT= 75.43%

COTTON

CPU TIME: 6.20 CLAPSED TIME: 3:57.18 NO EXECUTION ERRORS DETECTED

CAT# 1 2 3 4 5 6 7 6 8 POINTS 135 168 154 62 85 349 244 128 CAT# 9 A 8 POINTS 121 135 TOTAL NUMBER OF POINTS# 1593

MEANS:

CATS 1 2 3 4

1 37.03 31.95 55.26 31.19

2 35.27 29.17 61.05 35.90

3 36.23 30.29 54.82 29.36

4 36.46 36.84 61.48 32.90

5 35.71 31.16 66.25 37.08

6 34.93 29.99 71.15 39.74

7 36.64 32.57 51.49 27.10

8 36.28 30.39 57.24 31.92

9 39.93 37.28 57.82 30.49

A 27.73 17.08 12.19 2.99

#2

UMRIANCE-C	Cuartance			TRIANGULAR) +
CAT#	1	2	iniels 3	4
i	3 .03	3.06 6.02	1.29 2.05 4.61	-0.05 -0.84 1.48 3.88
\$	5.50	3.56 9.05	0.04 -0.81 3.72	-1.81 -3.67 2.24 4.99
3	3.74	2,71 5,55	1.27 1.51 8.24	-0.33 -0.36 3.50 3.88
4	2.05	1.07 5.02	0.20 0.57 2.18	-9.78 -0.31 9.17 3.22
er,	5.38	9.61 27.31	0.11 -0.01 3.43	-2.62 -5.72 1.04 3.96
6	2.32	3.15 9.26	-1.10 -4.35 7.98	-1.31 -4.04 3.09 4.16
7	4.17	5.23 12.11	0.64 0.55 6.96	~0.58 -1.44 3.44 4.17
8	4.56	5.11 9.85	0.86 ~0.65 5.58	~1.28 ~2. 5 6 2.37 4.67
9	2.63	2.48 7.17	0.25 0.46 6.32	0.02 0.32 3.37 3.60
A	1.04	0.30 1.09	0.17 0.36 0.92	0.14 6.10 -0.08

The Ten Clusters Examined in the Following Plots.


```
CATEGORIZED TO:
             FROM:
                                 :PASTURE WITH TREES:
                                                STUBBLE:
                                         SUDAN STUBBLE:
                                         JOHNSON GRASS:
                                                    HAY:
                                        WHEAT STUBBLE:
                                                   OATS:
                                           OAT STUBBLE:
                                                   IDLE:
                                       COASTAL PASTURE:
                      MILO:
                                               PASTURE: TOTAL:
                   :SORGHUM:COTTON:
              MILO:
                                                          823:
                                                    404:
                        264:
                               155:
           SORGHUM:
                                                          814:
                               570:
                                                    181:
            COTTON:
                        გ3:
PASTURE WITH TREES:
           STUBBLE:
     SUDAN STUBBLE:
     JOHNSON GRASS:
     WHEAT STUBBLE:
               UHTS:
       CHT STUBBLE:
               TULE:
   COASTAL PASTURE:
                                                  3717: 4704:
              87URE: 313: 674:
707AL: 640: 1399:
                       313:
                              674:
           PASTURE:
                                                   4302: 6341:
```


PER CENT CORRECT BY COVER


MILC SURGHUM 32.08% CUTTON 79.02% PASTURE WITH TREES STUBBLE SUDAN STUBBLE JOHNSON GRASS WHEAT STUBBLE UHTS OAT STUBBLE TULE COASTAL PASTURE 79.02% PASTURE

OVERALL PERCENT CORRECT= 71.77%

(Four Channel Plots)

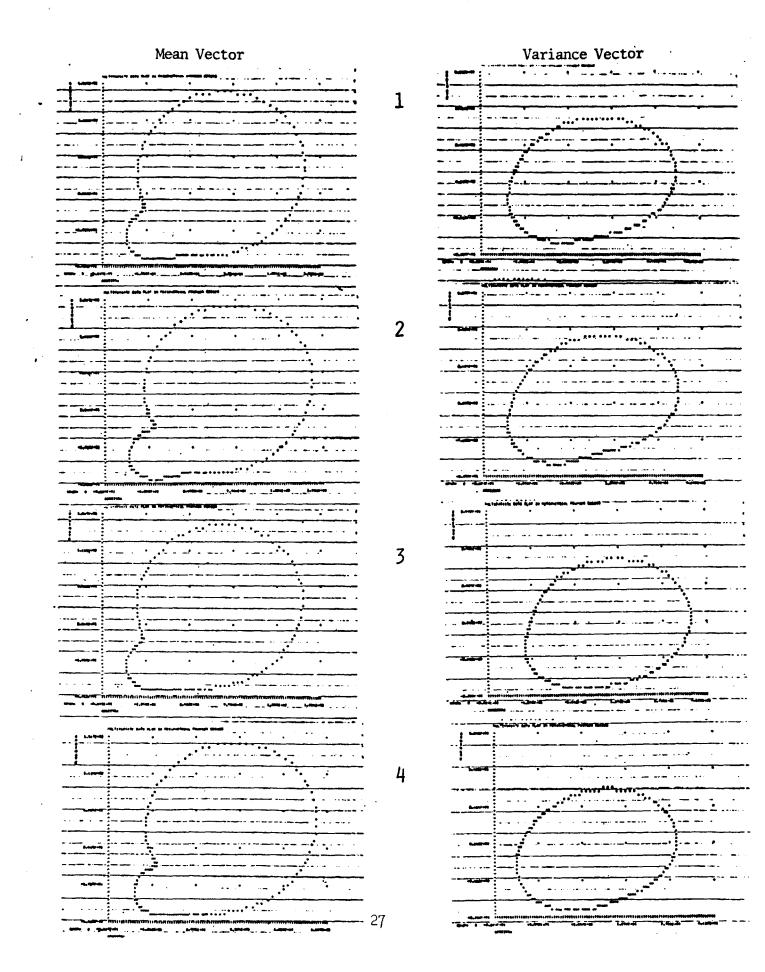

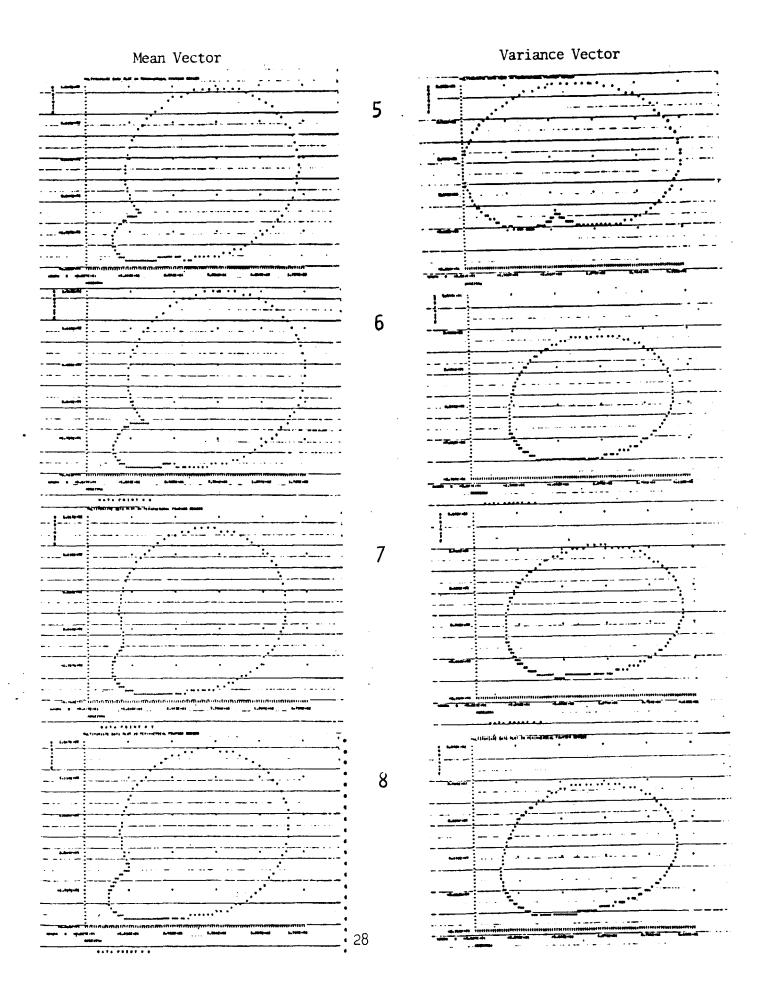

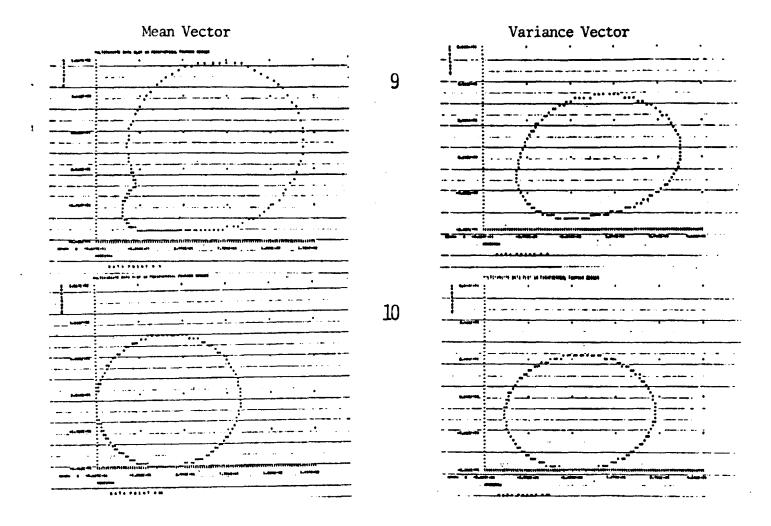

NOTES

- 1. Plots 1 and 2 are both sorghum plots.
- 2. Plots 3, 4, 5 and 6 are of cotton. We note that plot 4 is very much similar to those of sorghum.
- 3. Plots 7, 8 and 9 are of pasture, stubble and oats. Again, some similarities with the previous groups are evident.
- 4. Water is represented by plot 10. This is clearly different from the agricultural groups.

APPENDIX E


THIS PROGRAM PERFORMS A LINEAR REGRESSION OF VARIABLES Y ON X.

NAME OF Y-VARIABLE = REPORTED ACRES+COTTON

HAME OF X-VARIABLE = PIXELS COTTON

IS THE LATA TO BE ENTERED BY KEYBOARD? (Y OR N) Y

MOULD YOU LIKE TO SEE A PLOT OF Y VERSUS X? (Y OR N) Y

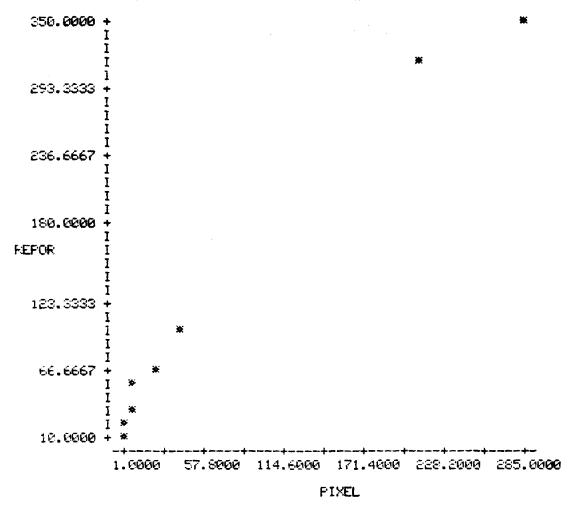

THE REGRESSION EQUATION IS:

REPORTED ACRES+COTTO = 0.35350E+02 + (0.11872E+01 * PIXELS COTTON

AMALYSIS OF VARIANCE TABLE FOR VARIABLE REPORTED ACRES+COTTO

SOURCE OF VARIATION	DEGREES OF FREEDOM	SUM OF SQUARES	MEAN SQUARES	F-UALUE	P-VALUE
FECRESSION RESIDUAL	1 6	123627.182000 3178.036260	123627.182000 529.672707	233.4030	0.0000

R = 0.987389

RSQUARE = .974938

DO YOU WISH TO TEST ANOTHER HYPOTHESIS? (Y OR N) N


DO YOU WISH TO ANALYZE AMOTHER DATA SET? (Y OR N) Y

NAME OF Y-WARIABLE = REPORTED ACRES+SORGHUM

NAME OF X-VARIABLE = PIXELS+SORGHUM

IS THE DATA TO BE ENTERED BY KEYBOARD? (Y OR N) Y

WOULD YOU LIKE TO SEE A PLOT OF Y VERSUS X? (Y OR N) Y

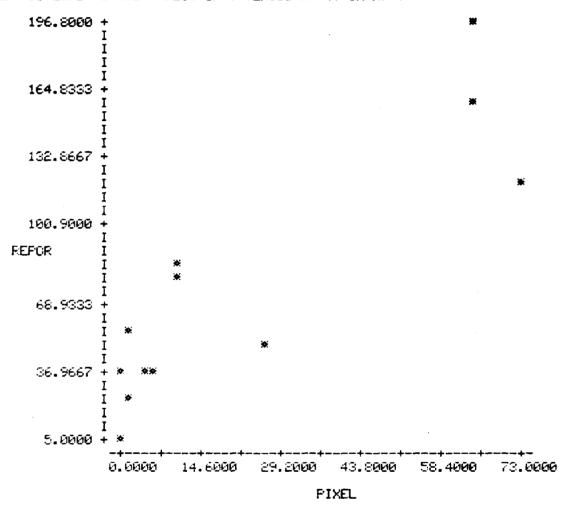

THE REGRESSION EQUATION IS:

REFORTED ACRES+SORGH = 0.30687E+02 + (0.18502E+01 * PIXELS+SORGHUM


ANALYSIS OF VARIANCE TABLE FOR VARIABLE REPORTED ACRES+SORGH


SOURCE OF VARIATION	DEGREES OF FREEDOM	SUM OF SQUARES	MEAN SQUARES	F-UALUE	F-VALUE
REGRESSION RESIDUAL	9	29585.872800 7475.508730	29585.872800 830.612083	35.6194	0.0002

MAME OF Y-VARIABLE = REPORTED ACRES+PASTURE

MAME OF X-VARIABLE = PIXELS+PASTURE

IS THE DATA TO BE ENTERED BY KEYBOARD? (Y OR N) Y



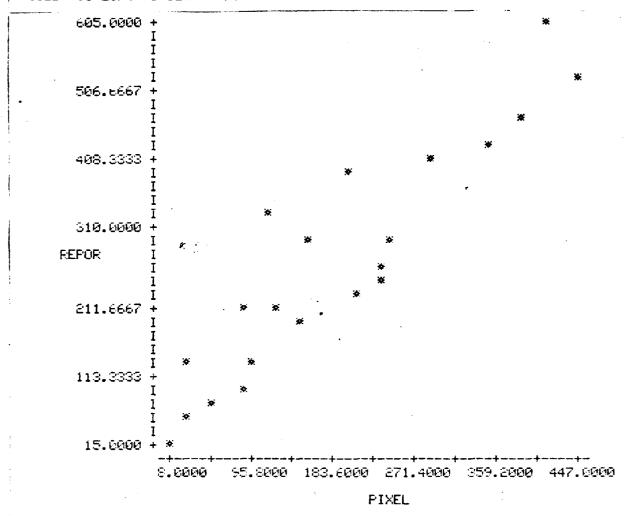

THE REGRESSION EQUATION IS:

. REPORTED ACRES+PASTU = 0.56174E+02 + (0.11380E+01 * FIXELS+PASTURE

ANALYSIS OF VARIANCE TABLE FOR VARIABLE REPORTED ACRES+PASTU

SOURCE OF I VARIATION	DEGREES OF FREEDOM	SUM OF SQUARES	MEAN SQUARES	F-VALUE	P-VALUE	
REGRESSION RESIDUAL	1 18	446341.742000 71446.508800	446341.742000 3969.250490	112.4499	0.0000	
R = 0.928448 RSQUARE = .862016						

REFERENCES

- 1. Crop Identification and Acreage Measurement Utilizing LANDSAT Imagery, USDA-SRS, Donald H. Von Steen and William H. Wigton, March, 1976.
- 2. "Selection, Sampling and Tabulation of Masked Fields in EDITOR", Center for Advanced Computation, University of Illinois at Urbana-Champaign, Martin Ozga, December, 1976, CAC Document No. 79.
- 3. Water Mapping for Satellite Data: An Automated Procedure, "Detection and Mapping Package", Volume 3, NASA, JSC, Ed Schlosser, June, 1976.
- 4. "Geometric Evaluation of MSS Images from ERTS-1", James Schoonmaker, Jr., USGS, Reston, Virginia.
- 5. "Griding of ERTS Images", William H. Chapman, USGS, Reston, Virginia.
- 6. "Expected Value of a Sample Estimate", Earl E. Houseman, USDA-SRS, SRS No. 19, September, 1974.
- 7. "Correlation of ERTS MSS Data and Earth Coordinates Systems", William A. Malila, Ross H. Hieber, Author P. McCleer, ERIM, Purdue Conference on Machine Processing of Remotely Sensed Data, October 16-18, 1973.
- 8. "Generation and Physical Characteristics of the ERTS MSS System Connected Computer Compatible Tapes", Valerie Thomas, Goddard Space Flight Center, Greenbelt, Maryland, July, 1973.
- 9. "Digital Image Processing of Earth Observation Sensed Data", R. Bernstein, IBM Journal of Research and Development, 20(1), 1976, pp. 40-57.
- LARSYS USER GUIDE, Volumes 1-3, LARS, Purdue University, June, 1973.
- 11. "Procedures for Boundary Location in LANDSAT MSS Digital Data", Paul W. Cook, USDA, Statistical Reporting Service, In Progress, 1977.